

SSEH Series

Radius Endmill for Exotic Alloys



SSEH Series




General Features

- Radius endmill for exotic alloys
- Titanium alloy and heat resistant alloy can be machined easily
- Large helix angle (45 degrees)
- Adhesion is reduced by special coating with almost mirror like surface
- The hard substrate and improved coating hardness enable higher tool life
- New radius endmill SSEHVL anti-vibration type achieves more stable machining


Characteristics

- **Excellent Cutting Performance and Chip Evacuation**
Large Helix angle (45 degrees) is used to improve cutting performance while providing smooth and steady chip evacuation.

Large helix angle




- **High Tool Rigidity**
The optimized web thickness and the shape and size of the flute provide tool rigidity and excellent chip evacuation.

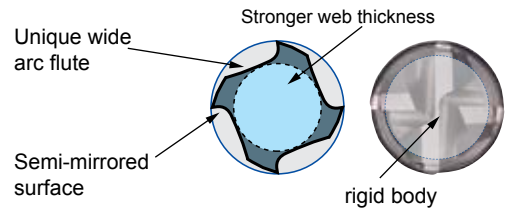


- **Improved Adhesion Resistance**
The semi-mirrored surface and the advanced coating technology improve adhesion resistance and wear resistance.

- **Improved Fracture Resistance**
Smooth radius shape mitigates cutting impact and improves fracture resistance.




- **Adoption of New Coating**
Ultra-smooth coating with significantly improved coating hardness and heat resistance improve tool life in heat resistant alloy machining.

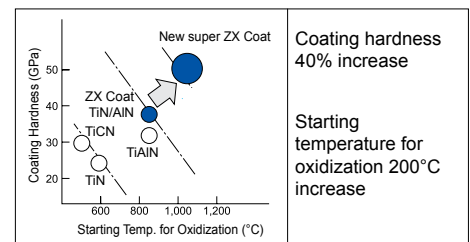

Series Selection Guide

Design	No. of Teeth	Diameter ØD _c (Min~Max)	Cat. No.	Grade	Coating	Appearance
Standard	4	Ø4,5 ~ Ø16	SSEH 4000W R	Coated Carbide	ACW	
		Ø4,5 ~ Ø16	SSEH 4000 R	Carbide		
Anti-vibration	4	Ø4,5 ~ Ø16	SSEHVL 4000W R	Coated Carbide	ACW	
		Ø4,5 ~ Ø16	SSEHVL 4000 R	Carbide		

Application Example

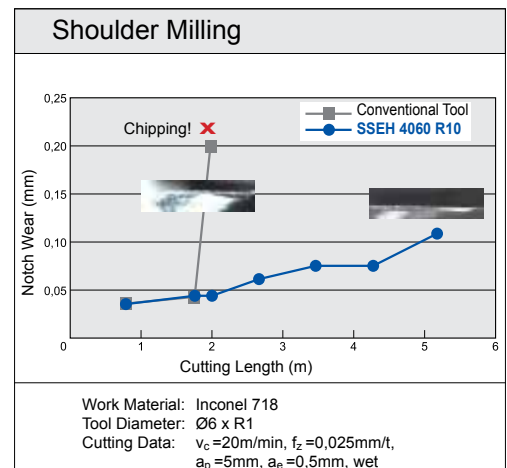

SSEH Standard Type


Endmill Identification

SSEH **4** **045** **W** **R05**
 Series No. of Diameter Coated Corner
 Code Teeth Radius

SSEH 4000W R (Coated)

General Steel	Carbon Steel	Alloyed Steel	Prehardened Steel	Tempered St. Die Steel	Hardened Steel	Stainless Steel	Ti Alloy Heat Resist. Alloy	Cast Iron	Al Alloy	Copper Alloy	Graphite
○	○	○	○	○	45-55 HRC	55-60 HRC	60-65 HRC	●	○	○	○


○ Good ● Best

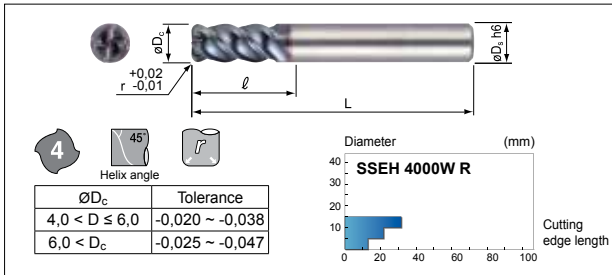

SSEH 4000 R (Uncoated)

General Steel	Carbon Steel	Alloyed Steel	Prehardened Steel	Tempered St. Die Steel	Hardened Steel	Stainless Steel	Ti Alloy Heat Resist. Alloy	Cast Iron	Al Alloy	Copper Alloy	Graphite
○	○	○	○	○	45-55 HRC	55-60 HRC	60-65 HRC	○	○	○	○

○ Good ● Best

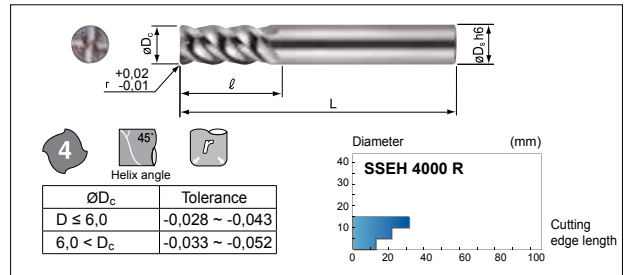

Body

Cat. No.	Stock	ØD _c	r	ℓ	L	ØD _s
SSEH 4045W R05	●	4,5	0,5	12	50	6
SSEH 4045W R10	●	4,5	1,0	12	50	6
SSEH 4050W R05	●	5,0	0,5	13	60	6
SSEH 4050W R10	●	5,0	1,0	13	60	6
SSEH 4060W R10	●	6,0	1,0	13	60	6
SSEH 4080W R10	●	8,0	1,0	19	80	8
SSEH 4100W R10	●	10,0	1,0	22	90	10
SSEH 4100W R30	●	10,0	3,0	22	90	10
SSEH 4120W R10	●	12,0	1,0	26	90	12
SSEH 4120W R30	●	12,0	3,0	26	90	12
SSEH 4160W R10	●	16,0	1,0	32	115	16
SSEH 4160W R30	●	16,0	3,0	32	115	16

● Euro stock Grade: ACW52

Body

Cat. No.	Stock	ØD _c	r	ℓ	L	ØD _s
SSEH 4045 R05	●	4,5	0,5	12	50	6
SSEH 4045 R10	●	4,5	1,0	12	50	6
SSEH 4050 R05	●	5,0	0,5	13	60	6
SSEH 4050 R10	●	5,0	1,0	13	60	6
SSEH 4060 R10	●	6,0	1,0	13	60	6
SSEH 4080 R10	●	8,0	1,0	19	80	8
SSEH 4100 R10	●	10,0	1,0	22	90	10
SSEH 4100 R30	●	10,0	3,0	22	90	10
SSEH 4120 R10	●	12,0	1,0	26	90	12
SSEH 4120 R30	●	12,0	3,0	26	90	12
SSEH 4160 R10	●	16,0	1,0	32	115	16
SSEH 4160 R30	●	16,0	3,0	32	115	16

● Euro stock Grade: EH520


Recommended Cutting Conditions

For stable machining, a high rigidity machine is recommended.
 Wet machining is recommended for stainless steel and heat resistant alloy applications.
 If cutting noise and vibration occur modify the cutting conditions accordingly.

Possible Diameter and Corner Radius Combination

D _c	r 0,5	r 1,0	r 3,0
4,5	●	●	
5,0	●	●	
6,0		●	
8,0		●	
10,0		●	●
12,0		●	●
16,0		●	●

● Euro stock



Shoulder Milling

Work Material	Stainless Steel		Titanium Alloy		Heat Resistant Steel	
	Spindle Speed (min ⁻¹)	Feed Rate (mm/min)	Spindle Speed (min ⁻¹)	Feed Rate (mm/min)	Spindle Speed (min ⁻¹)	Feed Rate (mm/min)
4,5	3.500	350	3.500	280	2.100	170
5,0	3.200	380	3.200	320	1.900	190
6,0	2.700	430	2.700	320	1.600	190
8,0	2.000	400	2.000	280	1.200	170
10,0	1.600	380	1.600	260	1.000	160
12,0	1.300	360	1.300	230	800	140
16,0	1.000	320	1.000	200	600	120
Depth of cut	ap	1,5D _c	ap	1,5D _c	ap	1,5D _c
ae		0,1D _c		0,05D _c		0,05D _c

Shoulder Milling

Work Material	Stainless Steel		Titanium Alloy		Heat Resistant Steel	
	Spindle Speed (min ⁻¹)	Feed Rate (mm/min)	Spindle Speed (min ⁻¹)	Feed Rate (mm/min)	Spindle Speed (min ⁻¹)	Feed Rate (mm/min)
4,5	1.800	90	3.500	280	1.400	110
5,0	1.600	100	3.200	320	1.300	130
6,0	1.300	100	2.700	320	1.100	130
8,0	1.000	100	2.000	280	800	110
10,0	800	100	1.600	260	600	100
12,0	700	100	1.300	230	500	90
16,0	500	80	1.000	200	400	80
Depth of cut	ap	1,5D _c	ap	1,5D _c	ap	1,5D _c
ae		0,1D _c		0,05D _c		0,05D _c

Grooving

Work Material	Stainless Steel		Titanium Alloy		Heat Resistant Steel	
	Spindle Speed (min ⁻¹)	Feed Rate (mm/min)	Spindle Speed (min ⁻¹)	Feed Rate (mm/min)	Spindle Speed (min ⁻¹)	Feed Rate (mm/min)
4,5	2.800	140	2.500	200	1.300	100
5,0	2.500	150	2.200	220	1.100	110
6,0	2.100	170	1.900	230	1.000	120
8,0	1.600	160	1.400	200	700	100
10,0	1.300	160	1.100	180	600	100
12,0	1.100	150	900	160	500	90
16,0	800	130	700	140	400	80
Depth of cut	ap	0,3D _c	ap	0,2D _c	ap	0,15D _c

Grooving

Work Material	Stainless Steel		Titanium Alloy		Heat Resistant Steel	
	Spindle Speed (min ⁻¹)	Feed Rate (mm/min)	Spindle Speed (min ⁻¹)	Feed Rate (mm/min)	Spindle Speed (min ⁻¹)	Feed Rate (mm/min)
4,5	1.400	40	2.500	200	1.100	90
5,0	1.300	40	2.200	220	1.000	100
6,0	1.100	40	1.900	230	800	100
8,0	800	40	1.400	200	600	80
10,0	600	40	1.100	180	500	80
12,0	500	40	900	160	400	70
16,0	400	30	700	140	300	60
Depth of cut	ap	0,3D _c	ap	0,2D _c	ap	0,15D _c

Radius Endmill


SSEHVL Anti-Vibration Type

Endmill Identification

SSEH **VL** **4** **045** **W** **R05**
 Series Code Vibration Less No. of Teeth Diameter Coated Corner Radius


SSEHVL 4000W R (Coated)

General Steel	Carbon Steel	Alloyed Steel	Prehardened Steel	Tempered St Die Steel	Hardened Steel	Stainless Steel	Ti Alloy Heat Resist. Alloy	Cast Iron	Al Alloy	Copper Alloy	Graphite
○	○	○	○	○	45-55 HRC	55-60 HRC	60-65 HRC	○	○	○	○
					○ Good ● Preferred Choice						

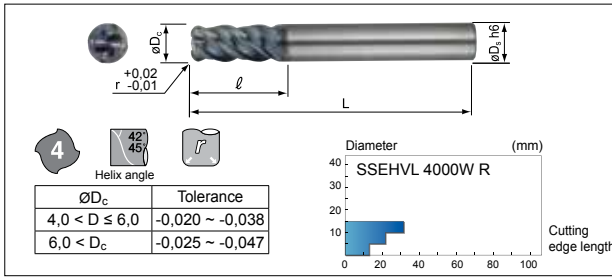

SSEHVL 4000 R (Uncoated)

General Steel	Carbon Steel	Alloyed Steel	Prehardened Steel	Tempered St Die Steel	Hardened Steel	Stainless Steel	Ti Alloy Heat Resist. Alloy	Cast Iron	Al Alloy	Copper Alloy	Graphite
○	○	○	○	○	45-55 HRC	55-60 HRC	60-65 HRC	○	○	○	○
					○ Good ● Best						

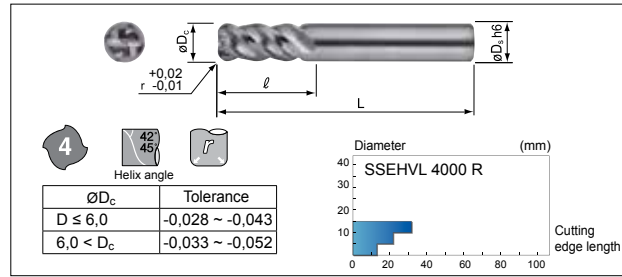

Body

Cat. No.	Stock	ØD _c	r	ℓ	L	ØD _s
SSEHVL 4045W R05	●	4,5	0,5	12	50	6
SSEHVL 4045W R10	●	4,5	1,0	12	50	6
SSEHVL 4050W R05	●	5,0	0,5	13	60	6
SSEHVL 4050W R10	●	5,0	1,0	13	60	6
SSEHVL 4060W R10	●	6,0	1,0	13	60	6
SSEHVL 4080W R10	●	8,0	1,0	19	80	8
SSEHVL 4100W R10	●	10,0	1,0	22	90	10
SSEHVL 4100W R30	●	10,0	3,0	22	90	10
SSEHVL 4120W R10	●	12,0	1,0	26	90	12
SSEHVL 4120W R30	●	12,0	3,0	26	90	12
SSEHVL 4160W R10	●	16,0	1,0	32	115	16
SSEHVL 4160W R30	●	16,0	3,0	32	115	16

● Euro stock Grade: ACW52

Body

Cat. No.	Stock	ØD _c	r	ℓ	L	ØD _s
SSEHVL 4045 R05	●	4,5	0,5	12	50	6
SSEHVL 4045 R10	●	4,5	1,0	12	50	6
SSEHVL 4050 R05	●	5,0	0,5	13	60	6
SSEHVL 4050 R10	●	5,0	1,0	13	60	6
SSEHVL 4060 R10	●	6,0	1,0	13	60	6
SSEHVL 4080 R10	●	8,0	1,0	19	80	8
SSEHVL 4100 R10	●	10,0	1,0	22	90	10
SSEHVL 4100 R30	●	10,0	3,0	22	90	10
SSEHVL 4120 R10	●	12,0	1,0	26	90	12
SSEHVL 4120 R30	●	12,0	3,0	26	90	12
SSEHVL 4160 R10	●	16,0	1,0	32	115	16
SSEHVL 4160 R30	●	16,0	3,0	32	115	16

● Euro stock Grade: EH520


Recommended Cutting Conditions

For stable machining, a high rigidity machine is recommended.
 Wet machining is recommended for stainless steel and heat resistant alloy applications.
 If cutting noise and vibration occur modify the cutting conditions accordingly.

Possible Diameter and Corner Radius Combination

D _c	r 0,5	r 1,0	r 3,0
4,5	●	●	
5,0	●	●	
6,0	●	●	
8,0	●	●	
10,0	●	●	●
12,0	●	●	●
16,0	●	●	●

● Euro stock



Shoulder Milling

Work Material	Stainless Steel		Titanium Alloy		Heat Resistant Steel	
	Spindle Speed (min ⁻¹)	Feed Rate (mm/min)	Spindle Speed (min ⁻¹)	Feed Rate (mm/min)	Spindle Speed (min ⁻¹)	Feed Rate (mm/min)
4,5	5.100	480	5.300	600	2.500	200
5,0	4.600	520	4.800	700	2.200	220
6,0	3.800	560	4.000	800	1.800	210
8,0	2.900	520	3.000	780	1.400	200
10,0	2.300	500	2.400	640	1.100	180
12,0	1.900	470	2.000	600	930	160
16,0	1.400	430	1.500	500	700	140

Depth of cut a_p 1,5D_c 1,5D_c 1,5D_c
 a_e 0,1D_c 0,05D_c 0,05D_c

Shoulder Milling

Work Material	Stainless Steel		Titanium Alloy		Heat Resistant Steel	
	Spindle Speed (min ⁻¹)	Feed Rate (mm/min)	Spindle Speed (min ⁻¹)	Feed Rate (mm/min)	Spindle Speed (min ⁻¹)	Feed Rate (mm/min)
4,5	2.300	120	4.600	370	1.600	130
5,0	2.000	130	4.100	410	1.500	150
6,0	1.700	130	3.400	400	1.200	140
8,0	1.300	130	2.600	360	900	130
10,0	1.000	130	2.100	340	700	110
12,0	800	110	1.700	300	600	100
16,0	600	90	1.300	260	500	100

Depth of cut a_p 1,5D_c 1,5D_c 1,5D_c
 a_e 0,1D_c 0,05D_c 0,05D_c

Grooving

Work Material	Stainless Steel		Titanium Alloy		Heat Resistant Steel	
	Spindle Speed (min ⁻¹)	Feed Rate (mm/min)	Spindle Speed (min ⁻¹)	Feed Rate (mm/min)	Spindle Speed (min ⁻¹)	Feed Rate (mm/min)
4,5	4.200	200	3.900	270	1.400	100
5,0	3.800	240	3.500	300	1.300	120
6,0	3.200	260	2.900	300	1.100	140
8,0	2.400	260	2.200	270	800	120
10,0	1.900	240	1.700	250	650	110
12,0	1.600	220	1.400	230	550	100
16,0	1.200	200	1.100	200	400	80

Depth of cut a_p 0,5D_c 0,2D_c 0,15D_c

Grooving

Work Material	Stainless Steel		Titanium Alloy		Heat Resistant Steel	
	Spindle Speed (min ⁻¹)	Feed Rate (mm/min)	Spindle Speed (min ⁻¹)	Feed Rate (mm/min)	Spindle Speed (min ⁻¹)	Feed Rate (mm/min)
4,5	1.800	50	3.200	250	1.300	110
5,0	1.600	50	2.900	290	1.200	120
6,0	1.400	50	2.400	290	1.000	120
8,0	1.000	50	1.800	250	700	90
10,0	800	50	1.400	230	600	100
12,0	600	50	1.200	210	500	90
16,0	500	40	900	180	400	80

Depth of cut a_p 0,3D_c 0,2D_c 0,15D_c


Characteristic of Anti-Vibration Type

New anti-vibration type added to the endmill series SSEH for exotic materials.


Builds on the same features of existing endmills by adding an irregular lead for exceptionally good anti-vibration performance.

Compatible with milling for wide range of exotic alloys including stainless steel, inconel and titanium.

Reduces chattering for high-speed, high-feed cutting.

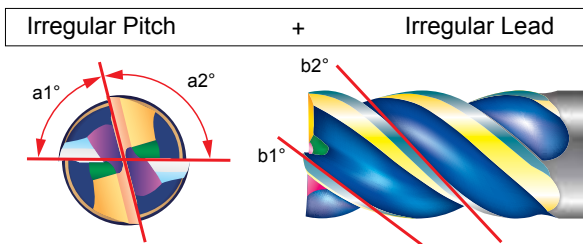

Application Examples

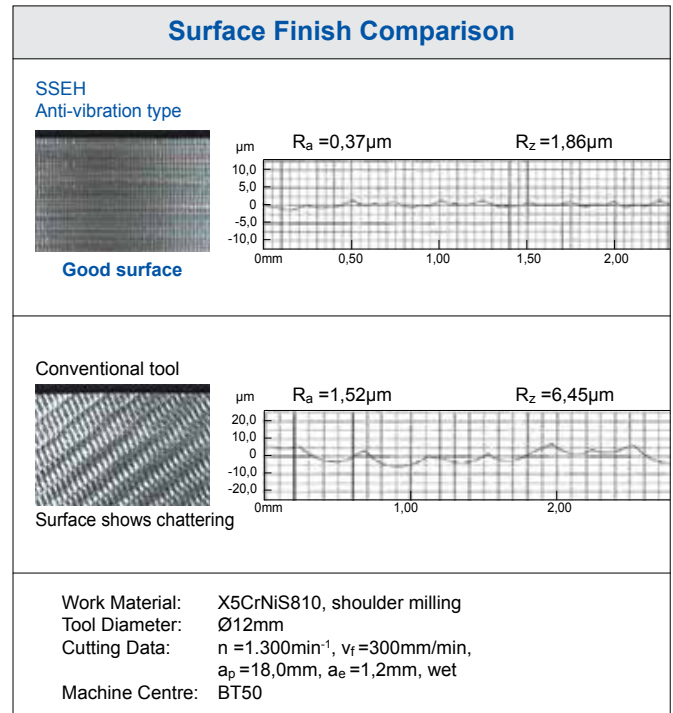

Corner Finishing of Titanium Alloy

	SSEH Radius Anti-Vibration Type SSEHVL 4120W 30	Endmill without Anti-Vibration Mechanism $\varnothing 12 \times R3,0$
Machined Surface	No vibration	Vibration
Vibration Data	Stable milling	Vibration at entry point
Detail of Milling Edge	No chipping	Chipping due to vibration
Cutting Data	$v_c = 42,4\text{m/min}$ ($n = 1.125\text{min}^{-1}$) $v_f = 200\text{mm/min}$ ($f_z = 0,044\text{min/t}$) $a_p = 5,0\text{mm}$, $a_e = 12\text{mm}$, wet	

Radius Endmill SSEH Series



Application Examples

Inconel 713

SSEH 4100W R10



Competitor's

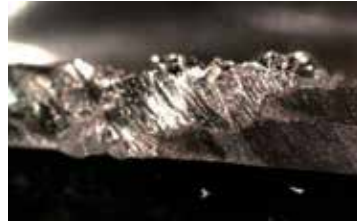


In Sumitomo tests the special coating with excellent adhesion resistance provided less cutting edge adhesion than the competitor's product and enabled fracture-free machining. The competitor's product suffered from edge adhesion leading to breakage.


Cutting Data: $v_c = 32\text{m/min}$, $f_z = 0,018\text{mm/t}$, $a_p = 20\text{mm}$, $a_e = 0,8\text{mm}$, dry
Diameter: $\varnothing 10 \times R1$
Tool Life: 150 pcs

Inconel 713C

SSEH 4080W R05

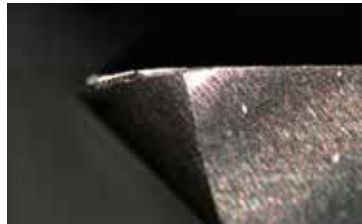

Competitor's



The SSEH type was able to be operated continuously without chipping by combination of the special rigid substrate and the smooth radius shape. In contrast the competitor's product resulted in chipping.



Cutting Data: $v_c = 6\text{m/min}$, $f_z = 0,025\text{mm/t}$, $a_p = 0,5\text{mm}$, $a_e = 6\text{mm}$, wet
Diameter: $\varnothing 8 \times R0,5$ (Special tool)
Cutting Length: 120mm

X5CrNi1810 (Stainless Steel)

SSEH 4060W R10



Conventional

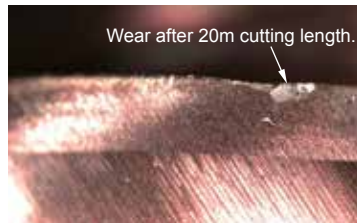

In dry machining where good heat resistance is required, the sharp edge reduces heat generation. The conventional tools resulted in boundary chipping. The SSEH type was able to be operated continuously up to the cutting length of 70m.

Cutting Data: $v_c = 50\text{m/min}$, $f_z = 0,04\text{mm/t}$, $a_p = 5\text{mm}$, $a_e = 1\text{mm}$, dry
Diameter: $\varnothing 6 \times R1$
Cutting Length: 20m



(Germany)

SUMITOMO ELECTRIC Hartmetall GmbH
Siemensring 84, D - 47877 Willich

Tel. +49(0)2154 4992-0, Fax +49(0)2154 41072
e-Mail: Info@SumitomoTool.com
Internet: www.sumitomoTool.com



(UK and Ireland)

SUMITOMO ELECTRIC Hardmetal Ltd.
Summerleys Road, Princes Risborough
Buckinghamshire HP27 9PW, UK

Tel. +44(0)1844 342081, Fax: +44(0)1844 342415
e-Mail: enquiries@sumitomo-hardmetal.co.uk
Internet: www.sumitomo-hardmetal.co.uk



Distributed by: